





technical specification

Maytag refrigeration

	Models	Magtag Trilogy				Maytag ZigZag		
	Model Number	SOV028HGB	SOV028TB	G32026PEKS	G32026PELB	SOV628HGB	SOV628ZB	GZ262GEKB
	Description	High Gloss Black	Full Stainless Steel	S/S Doors Silver Sides	Black	High Gloss Black	Stainless Steel	Black
performance & capacity	Model Number	G32026PEKW				GZ262GEKW		
	Description	White				White		
	Capacity (cu.ft) Litres Gross/Net	(19.6) 561/522	(19.6) 561/522	(19.6) 561/522	(19.6) 561/522	(25.6) 715/696	(25.6) 715/696	(25.6) 715/696
	Fresh Food Capacity (cu.ft) Litres Gross/Net	(14.1) 404/399	(14.1) 404/399	(14.1) 404/399	(14.1) 404/399	(16.34) 469/460	(16.34) 469/460	(16.34) 469/460
	Freezer Capacity (cu.ft) Litres Gross/Net	(5.5) 157/153	(5.5) 157/153	(5.5) 157/153	(5.5) 157/153	(9.24) 246/236	(9.24) 246/236	(9.24) 246/236
	Total Shelf Area (cu.ft)	22.2	22.2	22.2	22.2	23.7	23.7	23.7
	Energy Class/Climate Class/KWH per year/DBA	A/T/547/44	A/T/547/44	A/T/547/44	A/T/547/44	A/T/657/44	A/T/657/44	A/T/657/44
	Freezing Capacity (kg/24h)	9.5	9.5	9.5	9.5	19.4	19.4	19.4
	Star Rating of Freezer	4	4	4	4	4	4	4
	Four Point Levelling System	•	•	•	•	•	•	•
	Two Point Levelling System							
system controls	Voltage/Hertz	220-240V/50HZ	220-240V/50HZ	220-240V/50HZ	220-240V/50HZ	220-240V/50HZ	220-240V/50HZ	220-240V/50HZ
	Control System	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
	Water/Ice Filter					•	•	•
	Water Filter Indicator – On Controls					•	•	•
	Elevator Shelf					•	•	•
	Water					•	•	•
	Cubed Ice					•	•	•
	Crushed Ice					•	•	•
	Lock					•	•	•
	Dispenser Light					Off/Auto/On	Off/Auto/On	Off/Auto/On
dimensions	Water Filter Indicator – Façade					Dual Button Reset	Dual Button Reset	Dual Button Reset
	A Cabinet Height With Top Box (mm)	1796	1796			1815	1815	
	Cabinet Height With Hinge (mm)			1775	1775			1778
	B Cabinet Width (mm)	915	915	905	905	910	910	905
	C Cabinet Depth Without Door (mm)	599	599	597	597	713	713	711
	Cabinet Depth With Door (mm)	675	675	677	677	781	781	781
	Depth With Door Open to 90 degrees (mm)	1160	1160	1160	1160	1340	1340	1340
	Distance from Side Wall to allow full access (mm) *	400	400	400	400	400	400	400
	Approximate Shipping Weight (kgs)	168	168	138	138	186	186	156
extra features	Anti-bacterial Protection	•	•	•	•	•	•	•
	Auto Defrost	•	•	•	•	•	•	•
	Freezer Shelves	N/A	N/A	N/A	N/A	4	4	4
	Fridge Position	Top	Top	Top	Top	Right hand side	Right hand side	Right hand side
	Fridge Shelves	5	5	5	5	5	5	5
	Tilting Door Baskets – Freezer					•	•	•
	Ice Maker (Optional Extra)	•	•	•	•			
	Extendable Crisper Drawers					•	•	•
	Extendable Freezer Baskets/Drawers					•	•	•
	Humidity Controlled Crisper Drawer	•	•	•	•	•	•	•
	Temperature Controlled Meat and Cheese Drawer					•	•	•
	Chef's Pantry	•	•	•	•			
	Refrigerator Lights	•	•	•	•	•	•	•
	Freezer Lights	•	•	•	•	•	•	•
Fitted Panel Kit for 6mm Panels								
Power Cut Safe Time	7 hours	7 hours	7 hours	7 hours	7 hours	7 hours	7 hours	

* Removing the shelves and drawers requires the doors to be open wider than 90 degrees

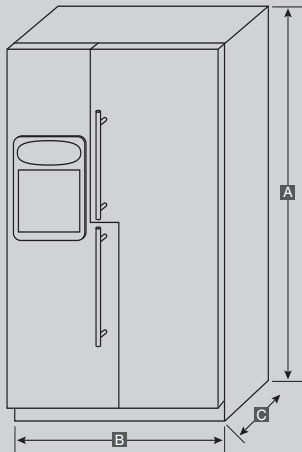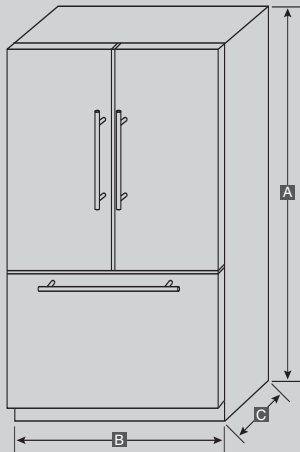

TRIOLOGY


ZIGZAG

Maytag 20 Series								Maytag 22 Series <small>CONT'D OVERLEAF</small>	
GLSS2028GB	GLSD2028GB	SOV2028GB	MD2028GB	MAL2028GBS	MAL2028GBB	MC2028HXKSI	MC2028HXKKB	SOV228HGB	SOV228GB
S/Steel and Glass	S/S & Gls, Slvr Sides	Stainless Steel	S/S, Silver Sides	Silver	Black	Silver	Black	High Gloss Black	Full Stainless Steel
MC2028HXKW									
White									
(19.3) 546/490	(19.3) 546/490	(19.3) 546/490	(19.3) 546/490	(19.3) 546/490	(19.3) 546/490	(19.3) 546/490	(19.3) 546/490	(21.57) 610/594	(21.57) 610/594
(12.0) 340/335	(12.0) 340/335	(12.0) 340/335	(12.0) 340/335	(12.0) 340/335	(12.0) 340/335	(12.0) 340/335	(12.0) 340/335	(13.48) 395/386	(13.48) 395/386
(7.3) 206/155	(7.3) 206/155	(7.3) 206/155	(7.3) 206/155	(7.3) 206/155	(7.3) 206/155	(7.3) 206/155	(7.3) 206/155	(8.09) 215/208	(8.09) 215/208
A ⁺ /NST/409/46	A ⁺ /NST/409/46	A ⁺ /NST/409/46	A ⁺ /NST/409/46	A ⁺ /NST/409/46	A ⁺ /NST/409/46	A ⁺ /NST/409/46	A ⁺ /NST/409/46	18.6	18.6
14	14	14	14	14	14	14	14	A/T/593/44	A/T/593/44
4	4	4	4	4	4	4	4	4	4
.
220-240/50HZ	220-240/50HZ	220-240/50HZ	220-240/50HZ	220-240/50HZ	220-240/50HZ	220-240/50HZ	220-240/50HZ	220-240V/50HZ	220-240V/50HZ
Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
.
.
.
.
.
.	Off/Auto/On	Off/Auto/On
.	Dual Button Reset	Dual Button Reset
1780	1780	1780	1780	1780	1780	1780	1780	1815	1815
905	905	905	905	905	905	905	905	915	915
600	600	600	600	600	600	600	600	600	600
680	680	675	675	675	675	675	675	670	670
1530	1530	1530	1530	1530	1530	1530	1530	1030	1030
450	450	450	450	450	450	450	450	475	475
187	169	187	169	146	146	146	146	166	166
.
.
Right hand side	Right hand side	Right hand side	Right hand side	Right hand side	Right hand side	Right hand side	Right hand side	Right hand side	Right hand side
4	4	4	4	4	4	4	4	5	5
.
.
.
.
.
.
5 hours	5 hours	5 hours	5 hours	5 hours	5 hours	5 hours	5 hours	7 hours	7 hours


To ensure adequate ventilation, please allow 10mm on each side and 25mm on the top and rear of the installation. Heights may vary slightly due to levelling adjustments.

For appliances with ice and water dispensers, we recommend allowing an extra 25mm at the rear for plumbing connections and a minimum water pressure at the point of connection of between 30 and 120 PSI.

*Dimensional specifications are provided for planning purposes only.
For complete details see the installation instructions that accompany each product before selecting cabinetry, making cut-outs or beginning installation.*

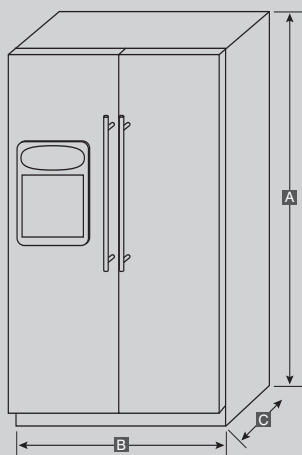

20 SERIES

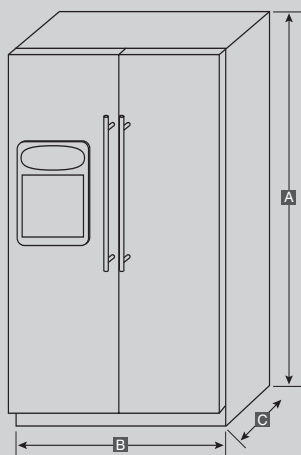

22 SERIES


We at Maytag are constantly working to make our products better. We therefore reserve the right to change designs or specifications without any notice. E&OE.

Maytag refrigeration continued

	Models	Maytag 22 Series <small>CONTINUED</small>					Maytag 26 Series	
	Model Number	GC2225GEKS	GC2225GEKB	GC2227HEK5	SOV228PW	GC2225PEKB	SOV628GB	GS265GEKB
	Description	Stainless Steel Doors	Black	Black with panel kit	No Ice&Water Stainless Steel New Aesthetic	No Ice&Water Black	Stainless Steel	Black
performance & capacity	Model Number	GC2225GEKW		GC2227HEK3		GC2225PEKW		GS265GEKW
	Description	White		White with panel kit		No Ice&Water White		White
	Capacity, (cu.ft) Litres Gross/Net	(21.57) 610/594	(21.57) 610/594	(21.57) 610/594	(21.5) 625/616	(21.5) 625/616	(25.6) 712/693	(25.6) 712/693
	Fresh Food Capacity (cu.ft) Litres Gross/Net	(13.48) 395/386	(13.48) 395/386	(13.48) 395/386	(13.51) 395/386	(13.51) 395/386	(15.83) 454/446	(15.83) 454/446
	Freezer Capacity (cu.ft) Litres Gross/Net	(8.09) 215/208	(8.09) 215/208	(8.09) 215/208	(7.96) 230/230	(7.96) 230/230	(9.77) 258/247	(9.77) 258/247
	Total Shelf Area (cu.ft)	18.6	18.6	18.6	21.3	21.3	22.1	22.1
	Energy Class/Climate Class/KWH per year/DBA	A/T/593/44	A/T/593/44	A/T/593/44	A/T/584/44	A/T/584/44	A/T/635/44	A/T/635/44
	Freezing Capacity (kg/24h)	12	12	12	13.1	13.1	13.4	13.4
	Star Rating of Freezer	4	4	4	4	4	4	4
	Four Point Levelling System	•	•	•	•	•	•	•
system controls	Two Point Levelling System							
	Voltage/Hz	220-240V/50HZ	220-240V/50HZ	220-240V/50HZ	220-240V/50HZ	220-240V/50HZ	220-240V/50HZ	220-240V/50HZ
	Control System	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
	Water/Ice Filter	•	•	•			•	•
	Water Filter Indicator On Controls	•	•	•			•	•
	Elevator Shelf	•	•	•			•	•
	Water	•	•	•			•	•
	Cubed Ice	•	•	•			•	•
	Crushed Ice	•	•	•			•	•
	Lock	•	•	•			•	•
dimensions	Dispenser Light	Off/Auto/On	Off/Auto/On	Off/Auto/On			Off/Auto/On	Off/Auto/On
	Water Filter Indicator – Façade	Dual Button Reset	Dual Button Reset	Dual Button Reset			Dual Button Reset	Dual Button Reset
	A Cabinet Height With Top Box (mm)				1780		1815	
	Cabinet Height With Hinge (mm)	1778	1778	1778		1780		1778
	B Cabinet Width (mm)	905	905	905	915	905	915	905
	C Cabinet Depth Without Door (mm)	597	597	597	599	597	913	711
	Cabinet Depth With Door (mm)	666	666	666	670	666	781	781
	Depth With Door Open to 90 degrees (mm)	1030	1030	1030	1160	1160	1160	1160
	Distance from Side Wall to allow full access (mm) *	475	475	475	400	400	400	400
	Approx Shipping Weight (kgs)	148	136	136	166	136	186	156
extra features	Anti-bacterial Protection	•	•	•	•	•	•	•
	Auto Defrost	•	•	•	•	•	•	•
	Freezer Shelves	4	4	4	5	5	4	4
	Fridge Position	Right hand side	Right hand side	Right hand side	Right hand side	Right hand side	Right hand side	Right hand side
	Fridge Shelves	5	5	5	4	4	5	5
	Tilting Door Baskets – Freezer	•	•	•	•	•	•	•
	Ice Maker (Optional Extra)				•	•		
	Extendable Crisper Drawers	•	•	•	•	•	•	•
	Extendable Freezer Baskets/Drawers	•	•	•	•	•	•	•
	Humidity Controlled Crisper Drawer	•	•	•	•	•	•	•
	Chef's Pantry							
	Refrigerator Lights	•	•	•	•	•	•	•
	Freezer Lights	•	•	•	•	•	•	•
	Fitted Panel Kit for 6mm Panels							
	Power Cut Safe Time	7 hours	7 hours	7 hours	7 hours	7 hours	7 hours	7 hours

* Removing the shelves and drawers requires the doors to be open wider than 90 degrees

panel kit dimensions	Height	Width	Max Panel Thickness
Refrigerator Door (mm)	1695	481	6
Ice & Water Door Upper (mm)	460	354	6
Ice & Water Door Lower (mm)	815	354	6

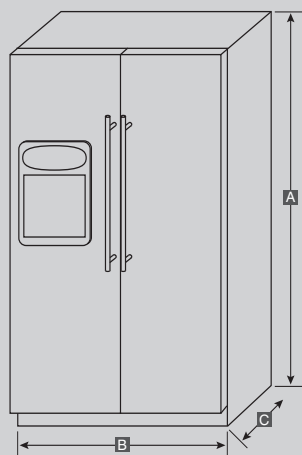

22 SERIES



26 SERIES

We at Maytag are constantly working to make our products better. We therefore reserve the right to change designs or specifications without any notice. E&OE.

Maytag 60 series washing

	Washing				
	Models				
performance	Model Number	MAH2441AGH	MAF9501AEW/S	MAF9602AES	MAF2002AES
	Colour	White	White/Stainless Steel	Stainless Steel	Stainless Steel
	Energy Rating	A+	A+	A+	A+
	Washing Performance	A	A	A	A
	Spinning Efficiency	B	B	A	A
specification	Water Consumption	49	54	54	54
	Energy Consumption (kWh)	1.02	1.02	1.02	1.02
	Noise Washing (dB(A))	54	52	52	44
	Noise Spinning (dB(A))	73	72	73	72
	Load Capacity (kg)	6	6	6	6
	Spin Speed (rpm)	1400	1400	1600	2000
	No. Programmes	18	10	10	10
	Cottons	•	•	•	•
	Colours	•	•	•	•
	Daily Load	•	•	•	•
	Delicates	•	•	•	•
	Synthetics	•	•	•	•
	Wool	•	•	•	•
	Handwash	•	•	•	•
	Quick Wash	•	•	•	•
	Variable Temperature	•	•	•	•
	Rinse Hold	•	•	•	•
	Super Rinse	•	•	•	•
	Water Level Reduction	•	•	•	•
	Spin Speed Reduction	•	•	•	•
	Extra Rinse	•	•	•	•
	Eco	•	•	•	•
	Easy Iron	•	•	•	•
	Automatic Half Load	•	•	•	•
	Delay Start	•	•	•	•
	Display	LED	LED	LED	LCD
dimensions	4 Point Suspension System	•	•	•	•
	Door Seal on Door	•	•	•	•
	Rubber Bellows Gasket	•	•	•	•
	Porthole Width (mm)	310	310	310	310
	A Appliance Height (with Max Foot Adjustment) (mm)	850	850	850	850
	B Appliance Width (mm)	595	595	595	595
	C Appliance Depth (mm)	570	585	585	585
	Appliance Depth with Door Open (mm)	950	1080	1080	1180

Maytag 60 series drying

	Vented			Condenser	
	Models				
performance	Model Number	MDE2441AGW	MDE9601AEW	MDE9651AEW/S	MDE9602AES
	Colour	White	White	White/Stainless Steel	Stainless Steel
	Energy Rating	C	C	C	C
	Typology	Rear Vented	Vented	Condenser	Condenser
	Energy Consumption (kWh)	3.39	4.02	4.38	4.48
specification	Noise dB(A)	65	64	69	66
	Load Capacity (kg)	6	6	6	7
	No. Programmes	9	6	6	6
	Sensor Programmes	•	4	4	4
	Anti-Crease	•	120 Mins	120 Mins	180 Mins
	Temperature	Gentle/Normal	Low/Normal	Low/Normal	Low/Normal
	Air Fluff	•	60 Mins	60 Mins	120 Mins
	Timed Dry	•	60 Mins	60 Mins	60 Mins
	Delay Start	•	24 Hrs	24 Hrs	24 Hrs
	Express Cooldown	•	•	•	•
	Display	LED	LED	LED	LCD
	A Appliance Height (with Max Foot Adjustment) (mm)	850	850	850	850
	B Appliance Width (mm)	595	595	595	595
	C Appliance Depth (mm)	575	595	595	595
	Appliance Depth with Door Open (mm)	990	1175	1175	1175

Dimensional specifications are provided for planning purposes only. For complete details see the installation instructions that accompany each product before selecting cabinetry, making cutouts or beginning installation.

Maytag American washing

	Washing	
	Models	
main spec	Model Number	3RMTW4905TW
	Description	Washing Machine
	Loading Method	Top Loading
	Capacity (kg)	7.5
	No of Programmes	5
features	Energy Rating/Consumption	G / 0.63kWh
	Permanent Press	•
	Delicates	•
	Hand Washable	•
	Normal	•
dimensions	Extra Rinse	•
	Temperature Selector	•
	Water Level Selector	Infinite
	Adjustable Feet	4
	A Height (mm) (incl cntrl panel)	1080
	B Width (mm)	686
	C Depth (mm)	650
	Appliance Height with Door Open (mm)	1300

Maytag American drying

	Tumble Dryer	
	Models	
main spec	Model	3RMED4905TW
	Description	Tumble Dryer
	Drying System	Vented
	Loading Method	Front Loading
	Automatic Sensor Drying	•
features	Capacity (kg)	7.5
	No of Programmes	7
	Energy Rating/Consumption	C / 6.50kWh
	Timed Dry Programmes	•
	Air Fluff	•
dim's	Freshen Up	•
	Front Mounted Lint Screen	•
	Adjustable Feet	4
	100mm / 2ft Vent Hose	•
	Rear Air Venting	•
	100mm Metal Duct Connect Required	•
	A Height (mm) (including control panel)	1100
	B Width (mm)	686
	C Depth (mm)	743


Laundry note – 60 series

When placing the drying cabinet next to a stacked tumble dryer and washing machine it is necessary to use the pull out shelf accessory in order for the heights and control panels to line up.

Laundry note – American


American Washing Machines require equal water pressure in both the hot and cold water inlet hoses. The water pressure must be between 30 and 120 psi.

The American Tumble Dryer requires a 30 amp electrical connection and should be vented into rigid metal ducting due to high temperatures (not supplied).

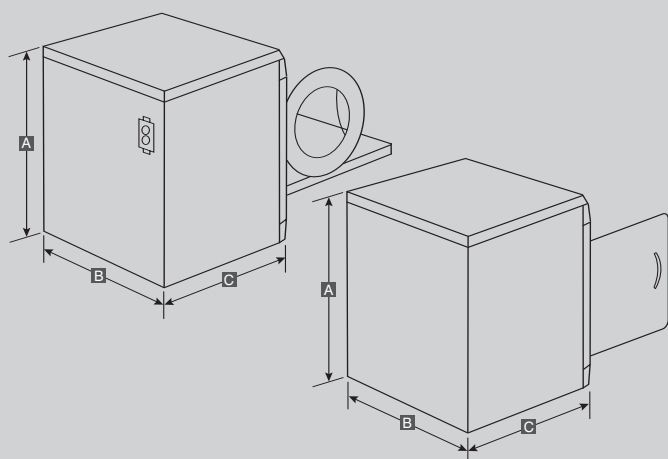

60 SERIES WASHER

60 SERIES TUMBLE DRYER

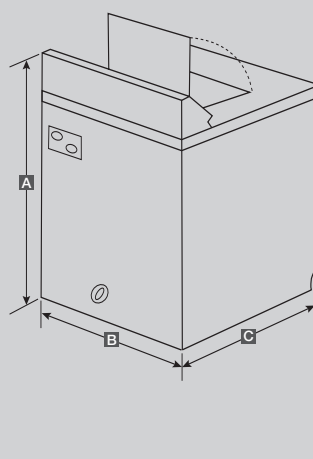

AMERICAN WASHER



AMERICAN TUMBLE DRYER

We at Maytag are constantly working to make our products better. We therefore reserve the right to change designs or specifications without any notice. E&OE.

Maytag drying cabinet

	Models	Drying Cabinet	
		MDE1100AEW	MDE1100AES
		White	Stainless Steel
performance	Energy Rating	N/A	N/A
	Typology	Vented	Vented
	Energy Consumption (kWh)	3.15	3.15
	Display	None	None
	Load Capacity (kg)	3.5	3.5
	Time Remaining Display	None	None
progs	Sensor Programmes		
	Timed Dry	4 hrs	7 hrs
	Aired Dry	4 hrs	4hrs
options	Number of Temperatures	3	3
	Delay Start		
	Figure of Eight Drying		
dimensions	A Appliance Height (mm)	1730	1730
	B Appliance Width (mm)	595	595
	C Appliance Depth (mm)	609	609
	Total Depth with Door Open (mm)	1204	1204
	Adjustable Feet	4	4
	Nett Weight (kg)	60	60
	Gross Weight (kg)	62	62
	Noise		

We at Maytag are constantly working to make our products better. We therefore reserve the right to change designs or specifications without any notice. E&OE.

Laundry note

When placing the drying cabinet next to a stacked tumble dryer and washing machine it is necessary to use the pull out shelf accessory in order for the heights and control panels to line up.

The drying cabinet should be vented into an extraction duct if surrounded by cabinetry, or situated in a small room.

Dimensional specifications are provided for planning purposes only. For complete details see the installation instructions that accompany each product before selecting cabinetry, making cut-outs or beginning installation.

[illegible]

SOV90GRC

* Inlet water at 15° C

SOV100GRC



We at Maytag are constantly working to make our products better. We therefore reserve the right to change designs or specifications without any notice. E&OE.

Maytag's heritage

Frederick Louis Maytag grasped the notion of the American Dream long before he built his first kitchen appliance. In the late 19th century, as a 16-year-old field hand, he saw an opportunity to create safe, labour-saving tools to do the work traditionally done by hand. By 1893 he had joined forces with his two brothers-in-law and George W. Parsons, opening their first factory in Newton, Iowa and going on to produce, not only the best farm implements in America, but also the world's premier home appliances. Throughout the 20th century the company was at the forefront of many industry-wide debuts, the first being the revolutionary 'Pastime' wooden tub washer, followed shortly by the introduction of the electrically powered washer. Maytag even produced the breathing equipment for the 1963 Mount Everest expedition. Now, more than 100 years after its humble beginnings, Maytag still spearheads the development of laundry, dishwashing and refrigeration categories worldwide and is renowned for combining time-honoured craftsmanship with modern technology and contemporary styling...unfailingly serving its customers by meeting their expectations for long-lasting and dependable products.



SERVICE & WARRANTY

The Maytag brand stands for exceptional quality...from the innovative designs on the drawing board, through the choice of only the finest materials, to assembly by craftsmen who take a genuine pride in their work. But this attention to detail doesn't end the day you make your purchase. Maytag appliances are delivered by experienced technicians whose job it is to ensure your product arrives in first class condition...and in perfect working order. That's why all Maytag Laundry, Dishwashing and Refrigeration products enjoy a full 2-year parts and labour warranty. In the unlikely event that a Maytag Range Cooker needs attention, it is covered by a full 1-year parts and labour warranty.